





GoTEN-tk

孔内局部载荷試験機 (Point Load Tester in borehole)

特許 第4584734号

【応用事例 (Application cases)】

■ 火害診断への応用 (Application for diagnosis of fire damages)

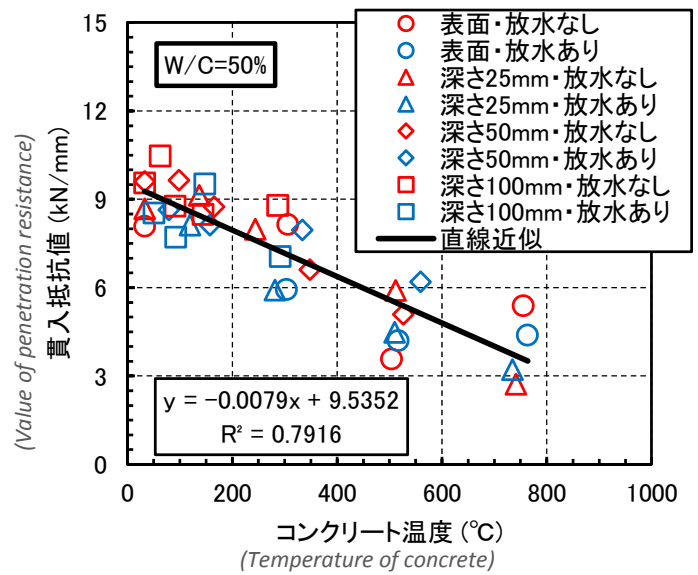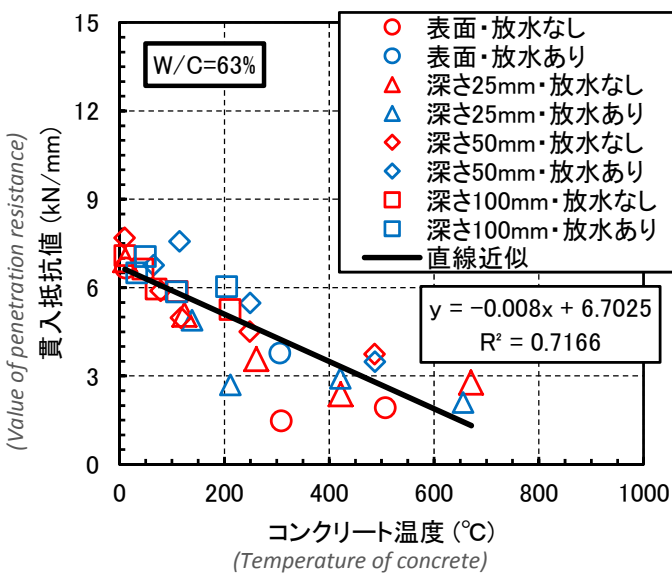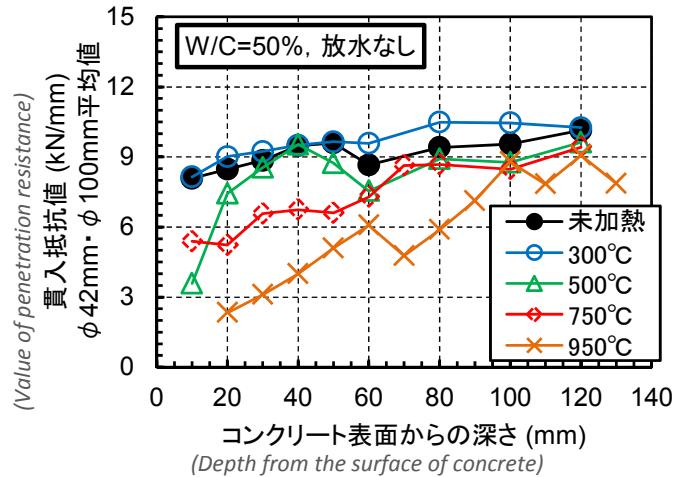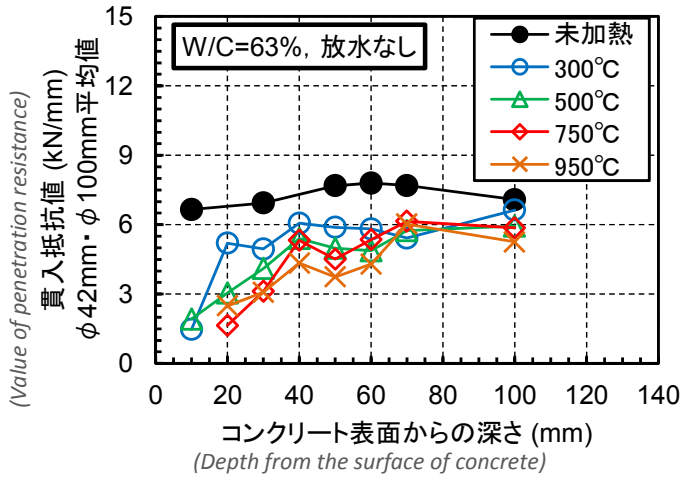

- 火害による物性低下深さを詳細（最小で深さ1 cmピッチ）に把握

Deteriorated depth by fire damage is determined by GoTEN measurements for every 1cm in depth.

- 貫入抵抗値とコンクリート温度測定値との関係から、測定深度における受熱温度の推定が可能

The temperature when it has received the heat is possible to be estimated by the relation between the value of penetration resistance and the measured value of concrete temperature.

